

CARGO 1300

80x120



ATP




Isothermal container for the transport of chilled and frozen products at a controlled temperature

- Suitable for supermarket chains, logistics operators, chilled or frozen food distributors and manufacturers, carriers.
- Europallet **internal dimensions**: maximum convenience in loading and unloading of goods on pallets.
- 1350 litres of capacity.
- Total compliance with the cold chain at all stages of transport.
- Speeds up distribution operations at the point of sales: it can be loaded inside the cold room of the wholesale centre and unloaded at the refrigerated counter of the destination supermarket.
- It can be transported using conventional vehicles: it allows to simultaneously transport chilled, frozen and ambient temperature products using a single non-insulated vehicle.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- **Fully recyclable** at the end of the operating life.


MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of the container and the door; suitable for food contact	Polyurethane	insulating material between the walls of the container and the door; free of CFC and HCFC
Silicone	seal	Nylon	wheels
Polypropylene	hinges	Stainless steel	handling handles, closing handle, inner rod of the door
Galvanised steel	hinge rods, connecting rods hinged plates, runner support		


TECHNICAL CHARACTERISTICS

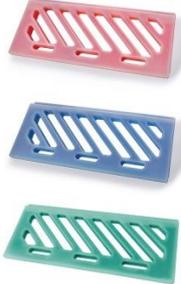	<p>Equipped with 6 feet of galvanised steel h 120 mm.</p>		<p>4 runners 125 mm diameter (2 fixed and 2 swivel of which one equipped with brake). Support runners plate integrated in the container.</p>
	<p>Europallet drip tray (on request)</p>		<p>Label holder (on request) for the identification of the content or destination. Suitable for A5 format documents.</p>
	<p>Door opens up to 270° with door retaining catch.</p>		<p>Easily removable door seal.</p>
	<p>Dual pivot hinge system. Better stability of the door over time.</p>		<p>Chilled and frozen and extra frozen eutectic plates, to increase temperature retention performance over time (on request).</p>
	<p>Stainless steel locking handle with release button.</p>		<p>Handle prepared for the use of tamper-proof system.</p>
	<p>Internal temperature can be checked through a thermometer installed in the door (on request).</p>		<p>Available (on request) USB data logger to record temperature data during transport</p>


TECHNICAL CHARACTERISTICS

	<p>Internal grooves improving good air circulation.</p>		<p>Mono-block structure, no sharp edges, joints and welds.</p>
	<p>Insulated with CFC and HCFC-free polyurethane foam.</p>	<p>°C</p>	<p>Guaranteed for use: from -30° to +100° C.</p>
<p>K</p>	<p>Overall heat transmission coefficient: K=0,35 W/m²K</p>		

TECHNICAL SPECIFICATIONS

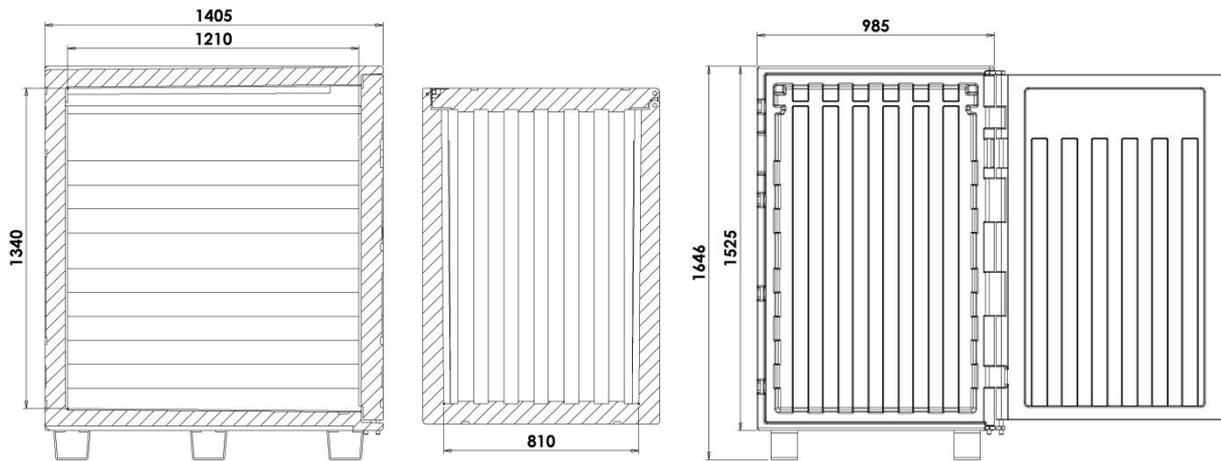

with feet

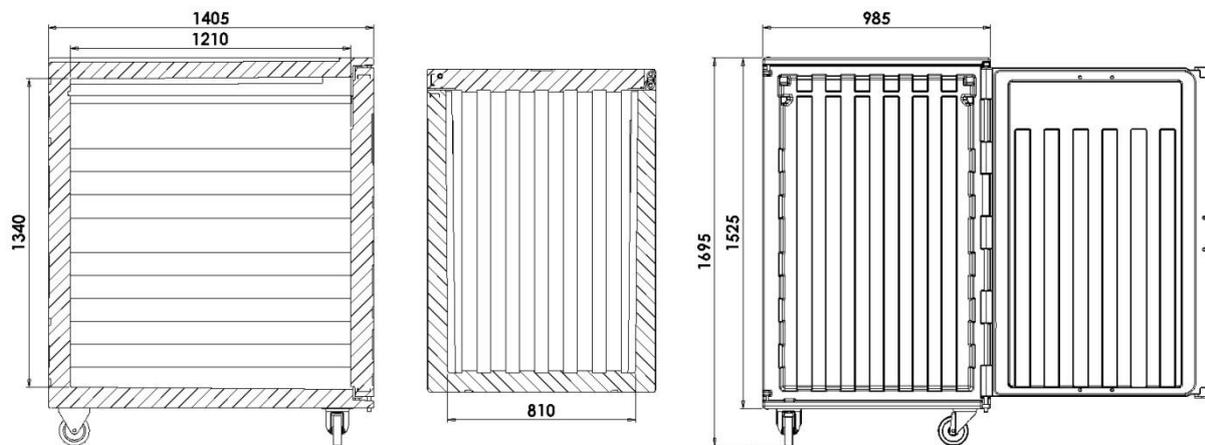

with runners

Model	Code	Colour	External dim. (mm)	Internal dim. (mm)	Capacity l	Weight Kg
Cargo 1300 with castors	13019009	melange grey blue	985x1405xh1695	810x1210xh1340	1350	153
Cargo 1300 with feet	13010003	melange grey blue	985x1405xh1646	810x1210xh1340	1350	153
Cargo 1300 with pallet	13010005	melange grey blue	985x1405xh1646	810x1210xh1340	1350	153
Label holder	AMC101	transparent	173xh200	148xh210 -A5-		
Pallet drip tray	ANA00101	blue	800X1200			
Eutectic plate Chilled +3°C - 3 x Cargo -	PE110001	pink	835x353xh45			7,6
Eutectic plate Frozen - 21°C - 3 x Cargo -	PE110002	blue	835x353xh45			7,6
Eutectic plate Extra Frozen - 21°C - 3 x Cargo -	PE119008	green	835x353xh45			7,6
Data logger USB	AFG002		80x33xh14			